

World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
**WO 2004/036049 A1**

- (51) International Patent Classification<sup>7</sup>: **F04C 29/04**, 18/16, 18/12, 29/10
- (74) Agent: **BOOTH, Andrew, Steven**; The BOC Group Plc, Chertsey Road, Windlesham, Surrey GU20 6HJ (GB).
- (21) International Application Number: PCT/GB2003/004415
- (22) International Filing Date: 10 October 2003 (10.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0223769.1 14 October 2002 (14.10.2002) GB
- (71) Applicant (for all designated States except US): **THE BOC GROUP PLC** [GB/GB]; Chertsey Road, Windlesham, Surrey GU20 6HJ (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **RANSOM, Kevin, Michael** [GB/GB]; 15 Longlands Glade, Charmandean, Worthing, West Sussex BN14 9NR (GB). **TUNNA, Clive, Marcus, Lloyd** [GB/GB]; Pendle Cottage, The Street, Bolney, West Sussex RH17 5QW (GB). **SKEATES, John, William** [GB/GB]; 40 Exeter House, Putney Heath, London SW15 3SX (GB). **PALMER, Cliff, Charles** [GB/GB]; 21 Amberley Road, Horsham, West Sussex RH12 4LJ (GB). **NORTH, Michael, Henry** [GB/GB]; 115 Blackborough Rd, Reigate, Surrey RH2 7DA (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report
  - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **SCREW PUMP**

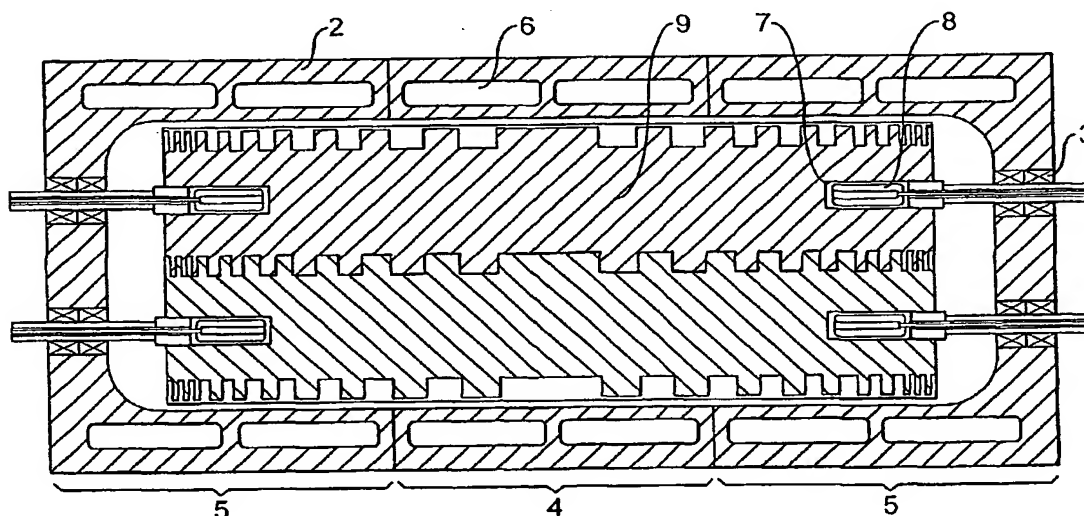

(57) Abstract: A pump comprises a stator and at least one rotor mounted within a housing. The housing comprises a first fluid channel extending about the rotor, the rotor comprising at least one second fluid channel. A first sensor is configured to output a signal indicative of the temperature of the stator; and a second sensor is configured to output a signal indicative of the temperature of the rotor. The temperature of fluid in the channel is controlled depending on the magnitude of signals output from the sensors.

This invention relates to the field of vacuum pumps. In particular thermal control of vacuum pumps with a screw type configuration.

Screw pumps usually comprise two spaced parallel shafts each carrying externally threaded rotors, the shafts being mounted in a pump body such that the threads of the rotors intermesh. Close tolerances between the rotor threads at the points of intermeshing and with the internal surface of the pump body, which acts as a stator, causes volumes of gas being pumped between an inlet and an outlet to be trapped between the threads of the rotors and the internal surface and thereby urged through the pump as the rotors rotate.

Prior art screw pumps use a water cooling jacket around sections of the machine in order to remove the heat of compression. However, the inlet of the machine does not have any cooling system since, at low pressures, there is little heat of compression to be removed from the inlet. As the pressure increases any additional heat is dispersed from the inlet by the increased gas flow through it. Where the pump is located in a cold environment, surface temperatures within the inlet of the pump may reduce significantly and form cold spots such that gaseous waste products from the evacuation chamber condense into liquid pools in these cooler regions. These pools can be formed from highly corrosive acid or base fluids and can lead to damage of the pump components, which, in turn, can reduce the life of the device.

Double ended screw pumps are known where a single inlet serves two outlets, the rotors being mounted in a co-linear fashion. In such a pump a disparity in temperature between the inlet and the outlet sections of the pump is more pronounced and concentricity of the bores within the housing components becomes important. If the housing components move out of alignment the rotor is more likely to clash with the stator as the already small tolerances reduce even further or are eliminated.

Screw pumps are increasingly being utilised in a broad range of applications. For example within a pharmaceutical process area the same pump may be required to perform numerous different applications. Whilst the configuration of a pump may be tailored to a particular application, once the application is altered, ideal conditions

will no longer be present and the pump will not be performing at peak/optimum efficiency.

It is an aim of the present invention to overcome some of the aforementioned problems associated with screw pump technology.

According to one aspect of the present invention there is provided a pump comprising:

- a stator;
- at least one rotor mounted within a housing, the housing comprising a first fluid channel extending about the rotor, the rotor comprising at least one second fluid channel;
- a first sensor configured to output a signal indicative of the temperature of the stator;
- a second sensor configured to output a signal indicative of the temperature of the rotor; and
- thermal control means for controlling the temperature of fluid, when present, in said channels depending on the magnitude of signals output from the sensors.

The first temperature sensor may be located at the stator, whereas the second temperature sensor may be located either in the exhaust plenum or within the housing, in fluid communication with process gas in an exhaust portion of the rotor, alternatively it may be situated in the gear box of the pump

The thermal control means may comprise first and second control means for controlling the temperature of any fluid in the first and second channels respectively. Either thermal control means at least one of each of a variable speed flow pump, a thermostatic control valve and a heat exchanger. They may be arranged to control the temperature of the fluid in the respective channels dependant on the magnitude of one or more of the sensors' outputs. The thermal control means may include/be controlled by a microprocessor.

One of the thermostatic control valves may comprise a mechanical differential temperature valve. This valve may comprise a third fluid channel in thermal communication with the second fluid channel. A flow restrictor may be provided within this third fluid channel to control the rate of fluid therethrough. The position of this flow restrictor may be governed by signals received from the first and second

sensors via signal receptors which may also form part of the valve. Each signal receptor may comprise a sealed component, the volume of which may expand in use. The degree of expansion being dependent on the magnitude of the signal received and determining the relative position of the restrictor within the third fluid channel. The sealed component of the signal receptor may comprise an expandable bellows. The flow restrictor may comprise a spindle and a seat. The spindle acting co-operatively with the seat to open and close an aperture to control the flow of fluid therethrough.

The pump may be of any known form, for example but not strictly limited to; a screw pump, a claw pump or a Roots pump.

According to a further aspect of the present invention there is provided a double-ended pump comprising at least one rotor, comprising:

- one inlet portion and two exhaust portions;
- a stator; and
- a housing, the housing comprising an inner skin and an outer skin, a first cavity being formed by the inner skin, the rotor being mounted therein and a second cavity being formed between the inner and outer skins of the housing through which a fluid is circulated, in use, wherein the second cavity extends the length of and encircles the rotor.

According to a further aspect of the present invention there is provided a valve comprising:

- a fluid channel;
- a flow restrictor moveable within the fluid channel to control the rate of flow of a fluid therethrough; and
- two signal receptors for receiving respective signals and controlling the position of the flow restrictor within the channel depending on the magnitude of the received signals.

According to a further aspect of the present invention there is provided a method for releasing the rotors of a pump that have seized due to the presence of deposits of a substance which has solidified on the internal working surfaces of the pump on cooling, comprising the steps of:

- introducing a thermal fluid into a cavity provided within the housing of the pump, the cavity encircling the rotor components;

heating the thermal fluid in the cavity to a predetermined temperature, this temperature being sufficiently high to cause the deposits to be softened; and applying torque to the rotors of the pump to overcome any remaining impeding force caused by the deposits located on the internal working surfaces of the pump.

According to a further aspect of the present invention there is provided a method for controlling a clearance between a rotor and stator within a pump, of the present invention, the method comprising the steps of:

- (a) recording the temperature of each of the stator and the rotor from the sensors;
- (b) calculating the temperature difference between the stator and the rotor;
- (c) comparing the temperature difference with a predetermined value;
- (d) determining suitable values of flow rate and temperature for the fluid in the first and second fluid channels to achieve the predetermined temperature difference; and
- (e) controlling the thermal control means to realise the values from step (d).

The method steps may be repeated automatically at predetermined time intervals in order to manage perturbations in the configuration of the pump over time. The predetermined temperature difference may be modified at predetermined time intervals to cause the clearance between components to be altered such that cumulative deposits can be dislodged from the surfaces of the components of the pump.

The thermal controller may comprise a microprocessor which may be embodied in a computer, which in turn is optionally programmed by computer software which, when installed on the computer, causes it to perform the method steps (a) to (e) mentioned above.

The present invention enables a pump to be subject to an improved level of thermal control. This allows benefits to be achieved during operation of the apparatus in terms of providing optimised running clearances enhancing the tolerance of the pump to excessive exhaust back pressures, reducing the occurrence of cold spots in the inlet of the pump, reducing thermal lag in the apparatus and enhancing the likelihood of restart in circumstances where deposits are formed due to cooling.

An example of the present invention will now be described with reference to the accompanying drawings in which:

Figure 1 illustrates a schematic plan cross section of a screw pump of the present invention;

Figure 2 illustrates a plan cross section of a double-ended screw pump of the present invention;

Figure 3 is a schematic of a temperature control circuit of the present invention;

Figure 4 illustrates further detail of the interface between the rotor and the stator of the pump in Figure 2;

Figure 5 illustrates a more sophisticated version of the present invention;

Figure 6 shows a further example of the present invention for use in more severe environments;

Figure 7 shows detail of a differential temperature valve for use in the pump of Figure 6: and

Figure 8 illustrates a Roots blower implementing thermal control of the present invention.

Screw pumps are illustrated in Figures 1 and 2. Two rotors 1 are provided within an outer housing 2. The two contra-rotating, intermeshing rotors 1 are positioned such that their central axes lie parallel to one another. The rotors 1 are mounted in the housing 2 via bearings 3. The single ended pump of Figure 1 comprises an inlet stator 4 and an exhaust stator 5, whereas the double ended pump of the example in Figure 2 comprises an inlet stator 4 positioned between two exhaust stators 5.

The housing 2 is provided as a double skinned construction. The internal skin acts as the stator of the pump. A cavity 6 is provided between the skins of the housing 2 such that a cooling fluid, such as water, can be circulated around the stator in order to conduct heat away from the working section of the pump. This cavity 6 encircles the full length of the stator i.e. over the inlet stator 4 as well as the exhaust stators 5. Cooling fluid is circulated through this cavity to draw heat away from the hot surface. By providing the water jacket over the length of the stator, heat generated towards the exhaust end of the rotor can be redistributed to the earlier stages when necessary. This will enable the temperature gradient to be reduced and allow a more uniform temperature to be maintained over the surface of the pump. Consequently, the 'cold spots' found in the prior art can be avoided and condensation

of potentially corrosive materials in the rotor inlet are substantially reduced. Furthermore, thermal lag is introduced into the system due to the presence of a complete water jacket which effectively prevents rapid temperature changes in the stator and rotor surfaces e.g. through wind chill effects. The maintenance of a uniform temperature causes all of the stator components to expand at the same rate from a central datum (the shaft) thus concentricity can be maintained and, consequently, the rotor retains its relative position within the stator and clashing of components can be avoided.

Conventional pumps with thermal jackets generally use convection to circulate the thermal liquid through the stator. This can lead to uneven distribution of temperature over the pump, notably, with cooler areas lower down the pump and warmer sections in the upper regions. Such localised cold spots can cause the process gases to condense out, becoming increasingly corrosive. By implementing a circulation pump within the thermal fluid consistent thermal control can be achieved such that local variations in temperature can be minimised.

In some cases, the waste products passing through the pump comprise a waxy or highly viscous substance and deposits are formed on the surfaces of the pump during operation. On shut down of the pump, these deposits cool and may solidify. Where such deposits are located in clearance regions between components, they can cause the pump to seize up. The motor may then provide insufficient torque to overcome this additional friction and cause the rotor to rotate. Additional torque can be applied using a leverage bar inserted into a socket on the shaft, which can then be rotated manually. However such a technique exerts a significant load on the rotor and may cause damage. However, it may not be possible to exert sufficient load to release the mechanism and force the shaft to rotate, under these circumstances it may be necessary to decommission the apparatus and take it out of service either for replacement or repair. An alternative use of the water jacket of the present invention can be implemented in these circumstances where the pump has become seized due to cooling of the rotor. The fluid in the cavity 6 of the housing 2 may be heated to raise the temperature of the stators 4,5 and the rotors 1. This can enhance the pliability of the residue and may assist in releasing the mechanism.

Figure 3 shows how fluid circuits 11,12, 12a and 15 may be used to control thermal conditions within the pump. The cooling liquid, typically a mixture of water and anti-freeze, is provided in a first closed circuit 11 with a circulation pump 17. A second fluid circuit 12, comprises a pressurised water circuit and a thermostatic

control valve 13. Typically, mains water is provided to this circuit at inlet 25 and is removed at outlet 26. A heat exchange component 14 is provided between these two fluid circuits 11, 12. The valve 13 receives an input signal from a thermal sensor 21 located at the stator and uses this to maintain a suitable flow rate in the second circuit 12 to govern the temperature gradient over the heat exchange component 14. This temperature gradient, in turn, maintains the temperature of the first circuit 11.

The rotor 1 comprises a threaded section 9 and a separate shaft component 8 as illustrated in Figure 2. The threaded section 9 is provided with an internal cooling cavity 7, into which is inserted the body of a separate shaft 8. The body of shaft 8 is fractionally smaller in diameter than the diameter of the cooling cavity 7 within the body of the rotor. Thus a cooling channel is provided, through which a coolant material, typically oil, may be passed. This channel is kept small to encourage the flow speed of the coolant to be as high as possible, in order to enhance the cooling function by maintaining the temperature difference between the rotor and the coolant and transporting heat back to a coolant reservoir. The cooling system inlet and outlet are provided through the shaft component 8.

Returning to Figure 3, it can be seen that the oil is retained in another closed circuit 15. This circuit 15 comprises a circulation pump 19 a filter 20 and a heat exchange component 14a. This heat exchange component is in contact with a second cooling circuit 12a and comprises a further thermostatic control valve 16. The thermostatic control valve 16 receives an input signal from a second thermal sensor 22 which indicates the temperature of the rotor either via the oil from circuit 15 or through the process gases within the latter stages of the rotor. Temperature may be monitored within the exhaust plenum (i.e. the cavity between the end of the rotor and the stator wall) but here, the temperature will rapidly fall below that of the rotor.

By introducing two thermostatic control valves as described, it is possible to control the temperature of the pump rotor relative to the stator temperature. The rotor to stator clearance  $d$  (as illustrated in Figure 4) in a screw pump is a function of this difference in temperature between the rotor and the stator. By controlling the temperatures of these components it is possible to control the magnitude of this clearance  $d$ . Furthermore, it is this clearance  $d$  that determines the level of leakage of process gas between the rotor and the stator, such that the volume of leakage is proportional to  $d^3$  for intermediate, transitional flow as shown in "Modern vacuum practice" by Nigel Harris, McGraw Hill (p231). Since leakage affects the performance of the pump, it follows that the performance of the pump can be optimised by



controlling the temperatures of these components. Furthermore, it is beneficial to be able to maintain clearances  $d$  such that any particulate content of the process gas does not form a blockage within these clearances and thus inhibit the free running of the rotor 1. Such obstruction can severely affect the performance of the pump through restriction of through flow of the process gas but also through additional torque that must be applied by the motor in order to maintain the appropriate speed of rotation of the rotor.

By providing a temperature control circuit within the rotor it is possible to thermostatically control rotor temperature relative to the stator temperature to optimise rotor/stator clearance  $d$ . In its simplest implementation the present invention can be used simply to avoid cold spots and thus eliminate corrosion due to condensation build up as discussed above. In a more sophisticated implementation, input signals can be taken from sensors mounted on each of the stator 4, 5 and the rotor 1 and these signals can be analysed/processed by a closed loop control system to maintain a set temperature, for example to be less than 135 °C. This allows a pump using the present invention to safely process materials with a known auto-ignition temperature.

However, as discussed above, the present invention can be used at an even higher level of sophistication to select particular temperatures that will result in a particular clearance  $d$  being achieved and maintained. Figure 5 illustrates how a processor or central processing unit (CPU) 27 may be incorporated into the system to receive signals indicative of the rotor and stator temperatures from sensors 22a and 21a respectively. These signals provide input to allow the processor 27 to determine the required temperatures of each of the components. The processor 27 then controls electronically activated valves 13a and 16a to provide a suitable level of coolant fluid to the heat exchange components 14, 14a to achieve the required thermal balance and subsequent clearance  $d$ .

Under normal steady state operation, a dry pump will attain a particular pumping speed determined by the clearance between the rotor and the stator. If the inlet pressure to the pump is increased more gas will enter the pump. This additional gas will cause the rotors to cool down with respect to the stator and hence the clearance  $d$  between these two components will increase. It follows that, at higher pressures, a significant amount of leakage around the rotor will occur. This is particularly problematic when pumping gas species such as helium, which typically result in low pump speeds and gas throughput being achieved when approaching

atmospheric pressures. With the control feature of the present invention it is possible to artificially reduce the clearance  $d$  between the rotor and the stator. Consequently leakage around the rotor may be reduced and the efficiency of the pump can be improved significantly. In the above example, when pumping helium, it is desirable to maintain a small gap to prevent leakage. However, the same pump could be used, in an alternative application, to pump Argon where a larger gap would be required. By providing a pump that can essentially be optimised during operation to function efficiently under varying conditions, a multi-purpose pump is achieved. This functionality can be used to good effect in fields, such as the pharmaceutical or chemical process industries, where a single pump needs to be used for different applications using the same tooling.

The temperature control can be dynamic within a particular process. On start up there will typically be a greater temperature difference since the temperature of the rotor increases at a faster rate than the stator due to the significant difference in thermal mass of the relative components. However, once the pump has reached a steady state this temperature difference will be reduced. By performing the temperature control dynamically, this early difference can be minimised such that the clearance  $d$  can be maintained at an approximately steady value. This, in turn, will lead to a more consistent level of pump efficiency.

The dynamic control of the clearances may be implemented in a cyclic manner when the pump is operating under normal conditions. At predetermined intervals the thermal conditions can be modified to reduce the clearances between the rotor and the stator for a short period of time. This will have the effect of removing/dislodging process deposits that have become adhered to these components. If this is repeated at intervals the cumulative build up of solid matter on the internal surfaces of the pump can be substantially reduced thus preventing seizure of the pump.

Seizure of the pump may be further be avoided by provision of an additional sensor for monitoring either the pressure within the pump or the power consumption of the pump. If either of these values increase significantly, this may be an indication that the clearances are becoming obstructed and that seizure is imminent. By monitoring these values it is possible to initiate a condition of maximum cooling of the rotor component to maximise the clearance between the rotor 1 and the stator 4, 5 and thus prevent seizure of the pump.

Alternatively the thermal control means may be provided by a purely mechanical means as illustrated in Figures 6 and 7 where a particular temperature difference can be automatically maintained between the stator and the rotor. In this way a simpler but more robust device can be implemented in pumps that are exposed to particularly harsh conditions. The mechanical thermal control device 24 is directly connected to a sensor 22 located as described above to indicate the rotor temperature through the process gas within the swept volume or oil temperature within the gearbox and also to a sensor 23 located within the stator of the pump. This latter sensor 23 may be located in a similar position to sensor 21 which provides input to the thermal control valve 13 in Figure 3. Each end of the differential temperature valve experiences a different temperature from each sensor causing a sealed sensor/bellows arrangement to be heated thus causing an expansion of the bellows. These two expanding bellows arrangements act in combination to position an internal valve. This valve position governs the amount of cooling fluid that may pass through the thermal circuit and thus alters the heat removal of the heat exchange unit 14a. This, in turn, controls the clearances within the pump by modifying the temperatures of the pump components. This simpler example maintains a temperature difference between the rotor 1 and the stator 4, 5 rather than actively controlling each component individually. However, by maintaining these relative temperatures a consistent clearance can be maintained. The valve 24 can be physically altered, for example, by restricting the expansion of one of the bellows components to adjust the magnitude of temperature difference between the rotor 1 and the stator 4, 5, thus allowing different processes to be accommodated.

The present invention is not restricted for use in screw pumps and may readily be applied to other types of pump such as claw pumps or Roots pumps. Indeed in some Roots blowers, significantly higher exhaust pressures (in some cases up to 2 to 3 bar) can be experienced. These raised pressures lead to a notable increase in component temperatures within the pump which can, in turn, lead to problems in maintaining appropriate clearances. By implementing dynamic thermal control according to the present invention these clearances can be maintained at consistent levels thus improving the tolerance of the pump to different operating conditions.

A rotor 35 from a Roots blower is illustrated in Figure 8, in order to introduce the thermal control of the present invention it is necessary to introduce a cooling channel 34 into the rotor 35 in a similar manner to that found in the screw rotor 1 of

Figure 2. Once again the channel is kept small to encourage the flow speed of the coolant to be as high as possible, in order to enhance the cooling function by maintaining the temperature difference between the rotor 35 and the coolant and transporting heat back to a coolant reservoir, typically the gear box (not shown). The cooling channel inlet 32 and outlet 33 are provided through the rotor shaft component 31. The cooling channel passes into each of the lobes 30 present on a Roots rotor 35, there may be two lobes as illustrated or there could readily be three, four or even more lobes on the rotor.

It is to be understood that the foregoing represents just a few embodiments of the invention, others of which will no doubt occur to the skilled addressee without departing from the true scope of the invention as defined by the claims appended hereto.

Claims

1. A pump comprising:
  - a stator;
  - at least one rotor mounted within a housing, the housing comprising a first fluid channel extending about the rotor, the rotor comprising at least one second fluid channel;
  - a first sensor configured to output a signal indicative of the temperature of the stator;
  - a second sensor configured to output a signal indicative of the temperature of the rotor; and
  - thermal control means for controlling the temperature of fluid, when present, in said channels depending on the magnitude of signals output from the sensors.
2. A pump according to claim 1, wherein the first temperature sensor is located at the stator.
3. A pump according to claim 1 or claim 2, wherein the second temperature sensor is located in the gear box.
4. A pump according to claim 1 or claim 2, wherein the second temperature sensor is located in the housing, in fluid contact, in use, with process gas in an exhaust portion of the rotor.
5. A pump according to any preceding claim, wherein the thermal control means comprises:
  - first control means for controlling the temperature of fluid in the first fluid channel; and
  - second control means for controlling the temperature of fluid in said at least one second fluid channel.
6. A pump according to claim 5, wherein the first control means comprises:
  - at least one flow pump;
  - at least one control valve; and
  - at least one heat exchanger.

7. A pump according to claim 5 or claim 6, wherein the first control means is arranged to control the temperature of fluid in the first fluid channel depending on the magnitude of a signal output from the first sensor.
8. A pump according to any of claims 5 to 7, wherein the second control means comprises:
  - at least one flow pump;
  - at least one control valve; and
  - at least one heat exchanger.
9. A pump according to any of claims 5 to 8, wherein the second control means is arranged to control the temperature of fluid in the at least one second fluid channel depending on the magnitude of a signal output from at least the second sensor.
10. A pump according to any of claims 5 to 9, wherein the second control means is arranged to control the temperature of fluid in the at least one second fluid channel depending on the magnitude of signals output from the second sensor and an additional sensor configured to output a signal indicative of the temperature of the stator.
11. A pump according to any of claims 5 to 9, wherein the second control means is arranged to control the temperature of fluid in the at least one second fluid channel depending on the magnitude of signals output from the first and second sensors.
12. A pump according to any of claims 5 to 11, comprising a microprocessor for controlling at least one of the first and second control means.
13. A pump according to any of claims 5 to 12, comprising a microprocessor for controlling both the first and the second control means.
14. A pump according to claim 12 or claim 13, comprising a third sensor configured to output to the microprocessor a signal indicative of one of the group of pressure and power consumption of the pump, wherein microprocessor is arranged to control at least the second control means depending on the magnitude of that signal.

15. A pump according to any of claims 9 to 12 when dependent from claim 8, wherein said at least one control valve of the second control means comprises a mechanical differential temperature valve.
16. A pump according to claim 15, wherein the mechanical valve comprises
  - a third fluid channel in thermal communication with the at least one second fluid channel;
  - a flow restrictor moveable within the third fluid channel to control the rate of flow of a fluid therethrough; and
  - two signal receptors for receiving signals from the first and second sensors respectively and controlling the position of the flow restrictor within the third fluid channel depending on the magnitude of the signals received from the first and second sensors.
17. A pump according to claim 16, wherein each signal receptor comprises a sealed component, a volume of each component expanding, in use, depending upon the magnitude of the signal received, thereby to control the relative position of the restrictor within the third fluid channel.
18. A pump according to claim 17, wherein each signal receptor comprises an expandable bellows.
19. A pump according to any of claims 16 to 18, wherein the flow restrictor comprises:
  - a spindle; and
  - a seat, the spindle acting cooperatively with the seat to open and close an aperture to control the flow of fluid therethrough, in use.
20. A pump according to any preceding claim, wherein the pump is one of the group of a screw pump, a claw pump and a Roots pump.
21. A pump according to any preceding claim, wherein the housing comprises an inner skin and an outer skin, a first cavity being formed by the inner skin, the rotor being mounted therein, the first fluid channel being formed between the inner and outer skins of the housing and extending the length of, and encircling, the rotor.
22. A pump according to claim 21, wherein the inner skin of the housing provides the stator, in use.
23. A double-ended pump comprising:

at least one rotor, comprising one inlet portion and two exhaust portions;  
a stator; and  
a housing, the housing comprising an inner skin and an outer skin, a first cavity being formed by the inner skin, the rotor being mounted therein and a second cavity being formed between the inner and outer skins of the housing through which a fluid is circulated, in use, wherein the second cavity extends the length of and encircles the rotor.

24. A valve comprising:

a fluid channel;  
a flow restrictor moveable within the fluid channel to control the rate of flow of a fluid therethrough; and  
two signal receptors for receiving respective signals and controlling the position of the flow restrictor within the channel depending on the magnitude of the received signals.

25. A method for releasing the rotors of a pump that have seized due to the presence of deposits of a substance which has formed on the internal working surfaces of the pump on cooling, comprising the steps of:

introducing a thermal fluid into a cavity provided within the housing of the pump, the cavity encircling the rotor components;  
heating the thermal fluid in the cavity to a predetermined temperature, this temperature being sufficiently high to cause the deposits to be softened; and  
applying torque to the rotors of the pump to overcome any remaining impeding force caused by the deposits located on the internal working surfaces of the pump.

26. A method for controlling a clearance between a rotor and stator within a pump according to any of claims 1 to 22, the method comprising the steps of:

(a) recording the temperature of each of the stator and the rotor using the signals output from the sensors;  
(b) calculating the temperature difference between the stator and the rotor;  
(c) comparing the temperature difference with a predetermined value;  
(d) determining suitable values of flow rate and temperature for the fluid in the first and second fluid channels to achieve a predetermined temperature difference; and  
(e) controlling the thermal control means to realise the values from step (d).



27. A method according to claim 26, wherein the method steps are automatically repeated at predetermined time intervals to manage perturbations in the configuration of the pump over time.
28. A method according to claim 26 or claim 27, wherein the predetermined temperature difference is modified at predetermined time intervals to cause the clearance between components to be altered such that cumulative deposits can be dislodged from the surfaces of the components of the pump.
29. A computer program which, when installed on a computer, causes the computer to perform the method of claim 26, 27 or 28.
30. A computer readable carrier medium which carries a computer program as claimed in claim 29.
31. A computer readable carrier medium according to claim 30, wherein the medium is selected from; a floppy disk, a CD rom, a mini-disc or digital tape.

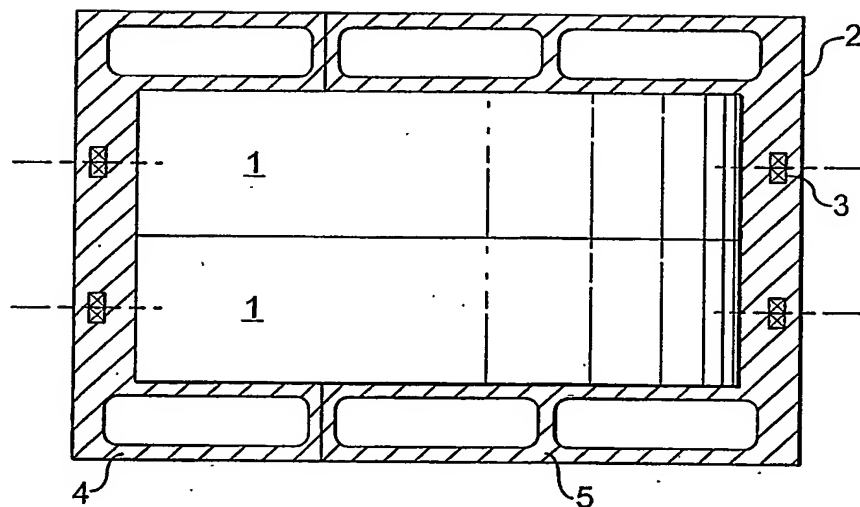


FIG. 1

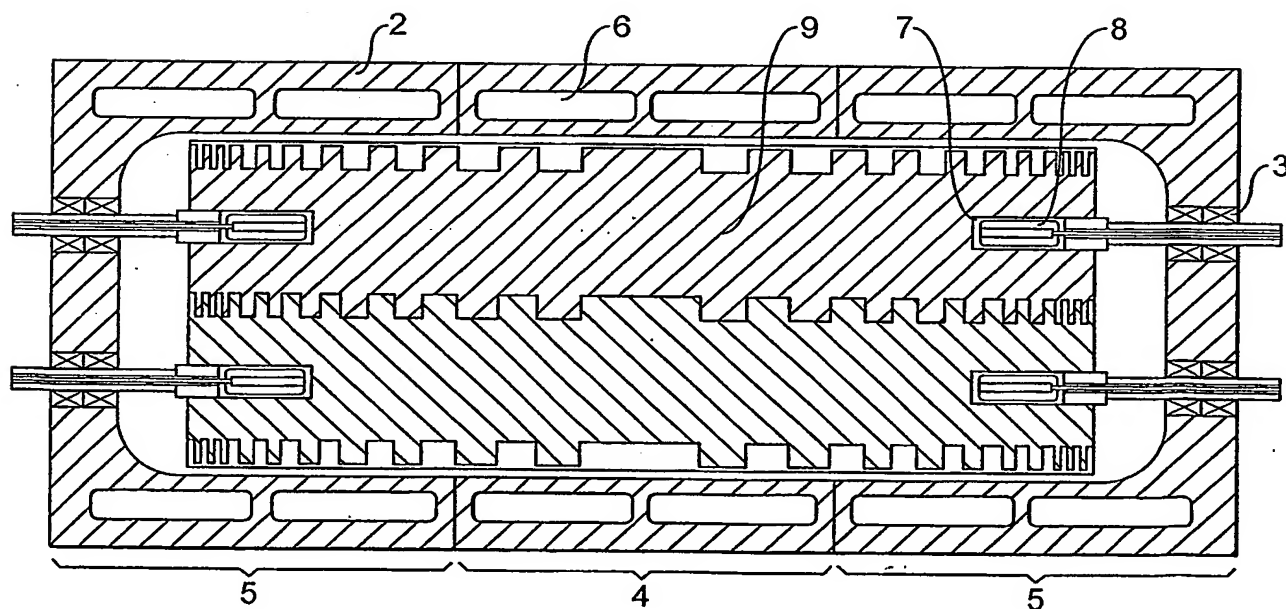


FIG. 2

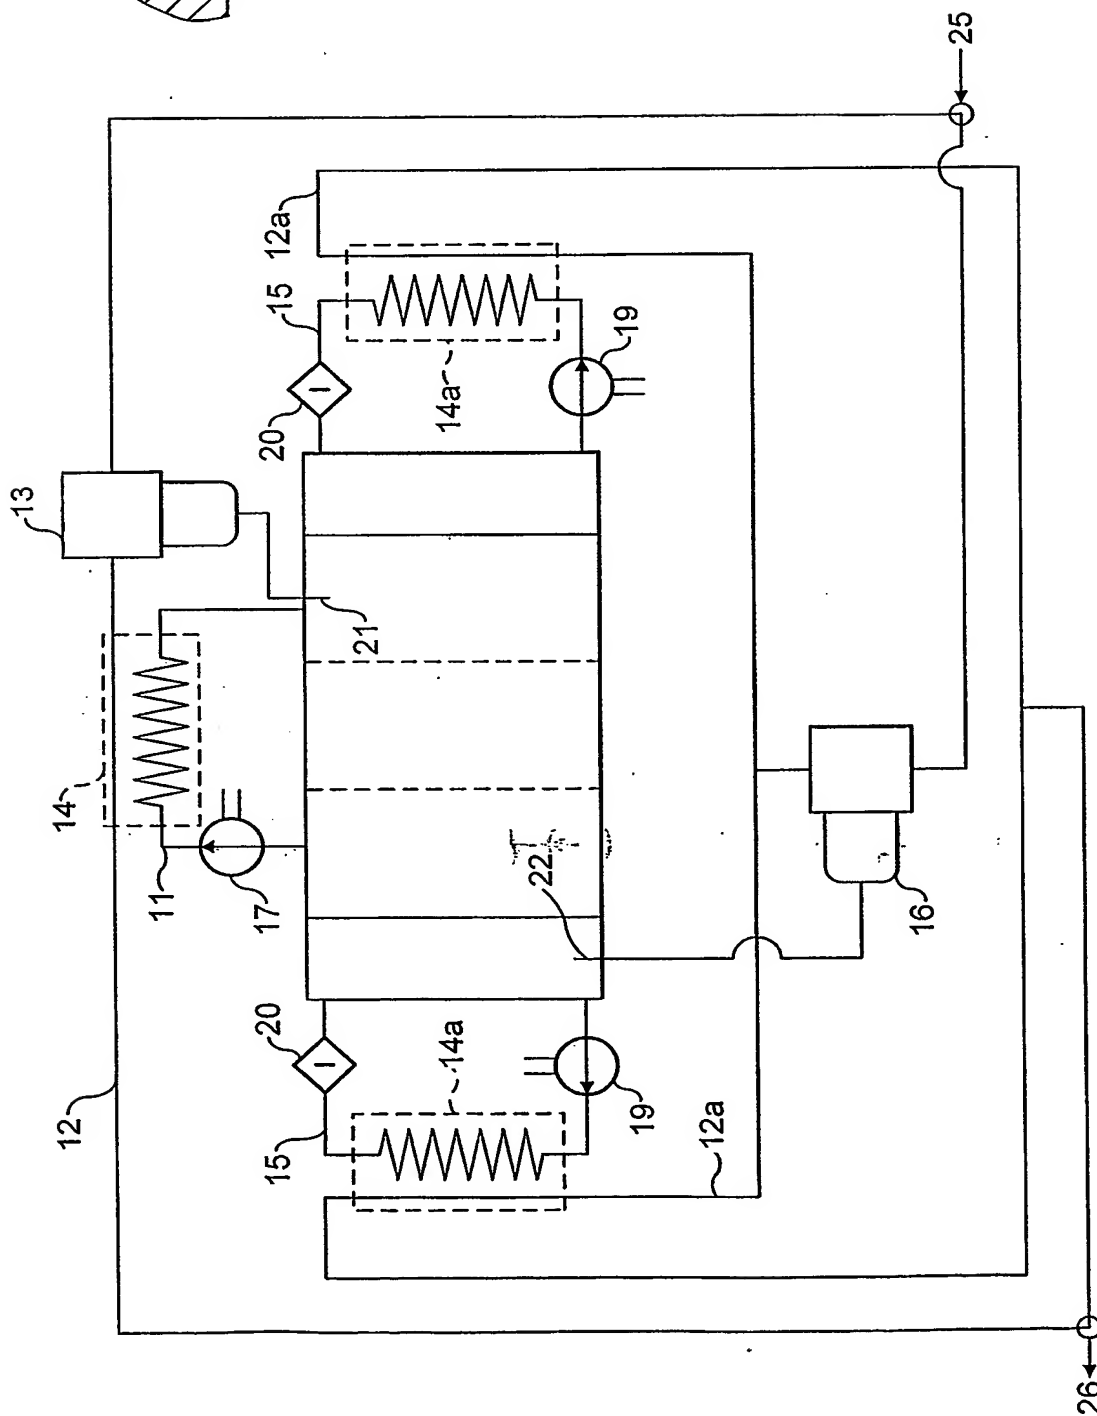
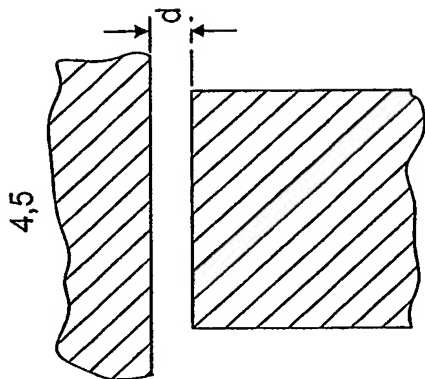


FIG. 3

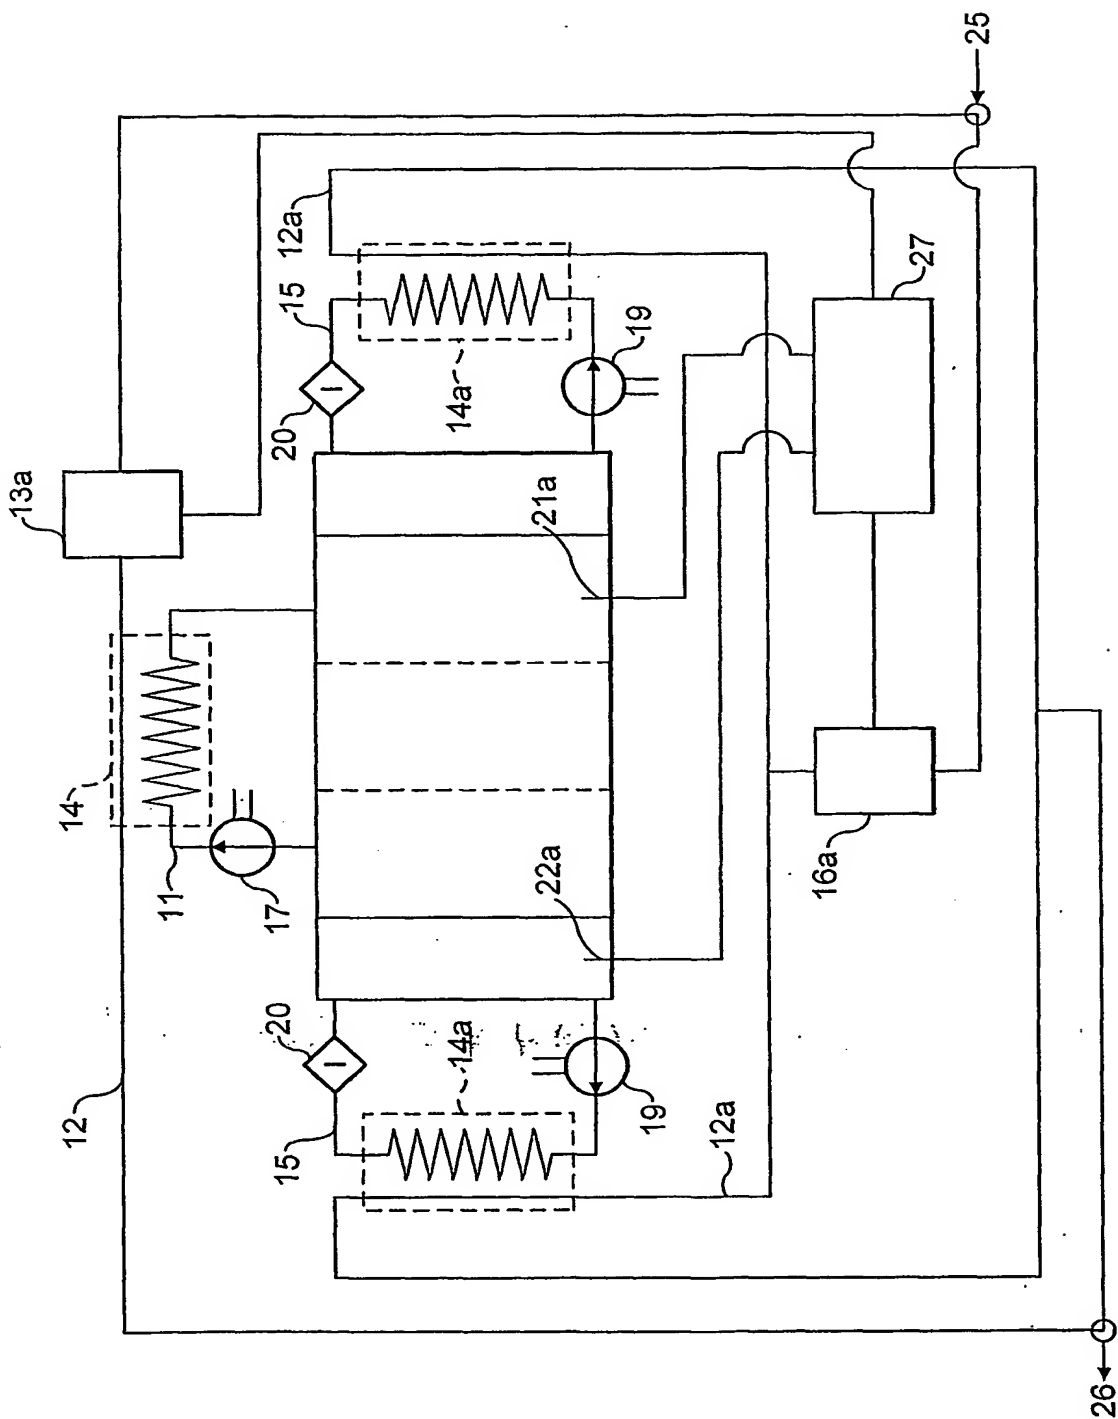


FIG. 5

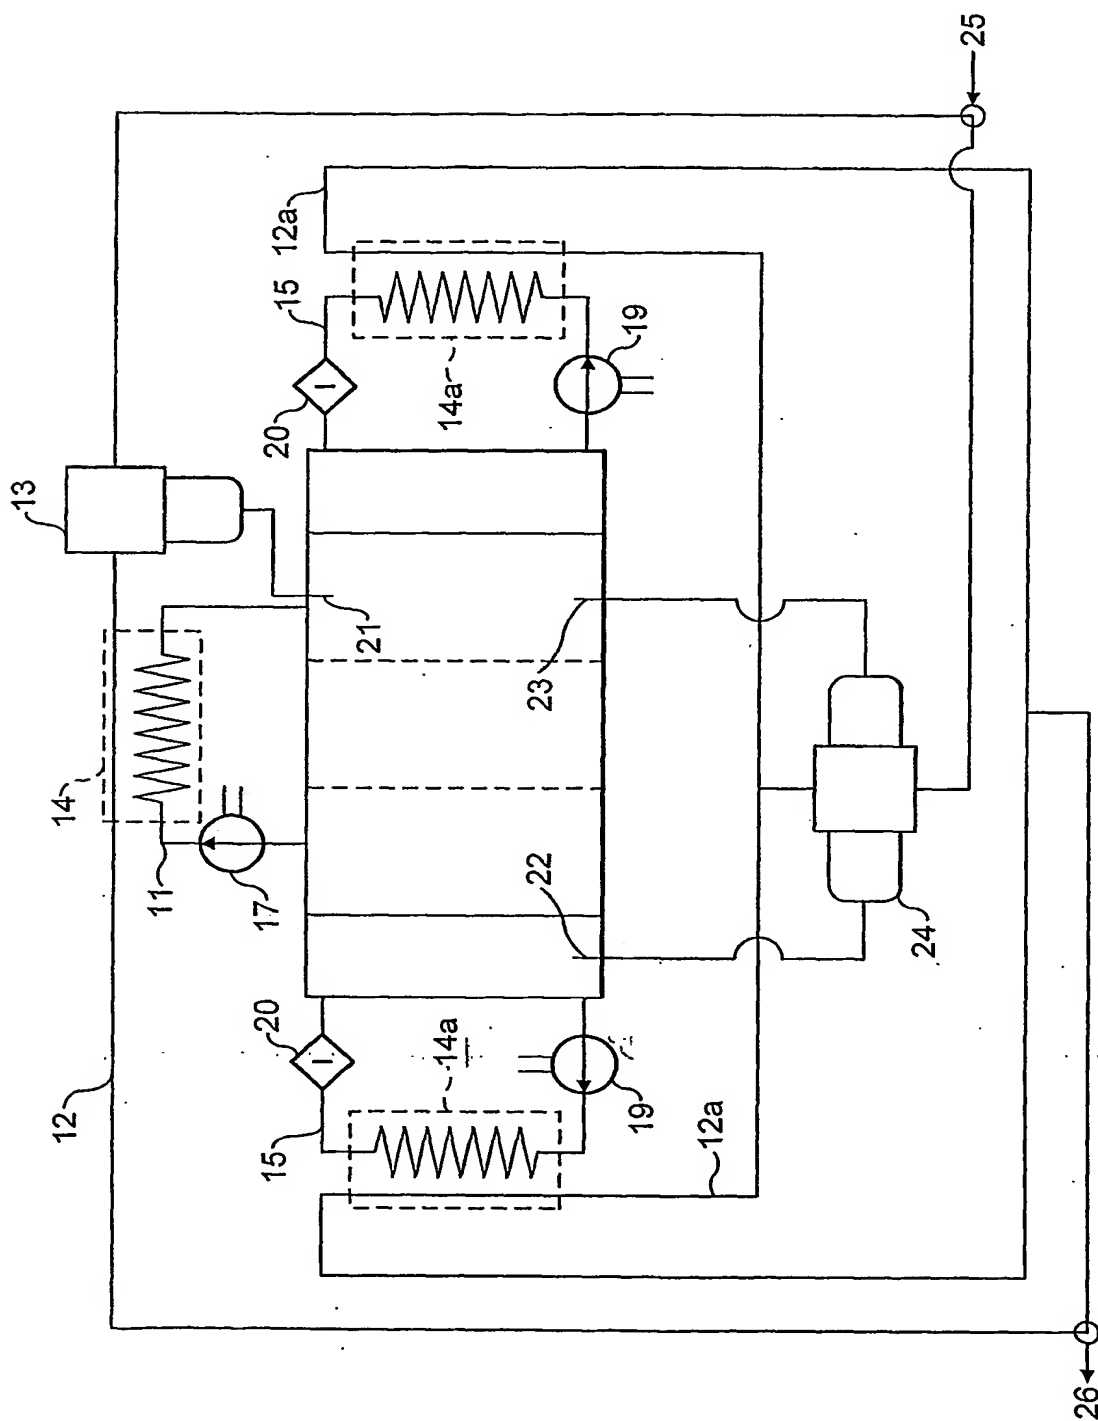


FIG. 6

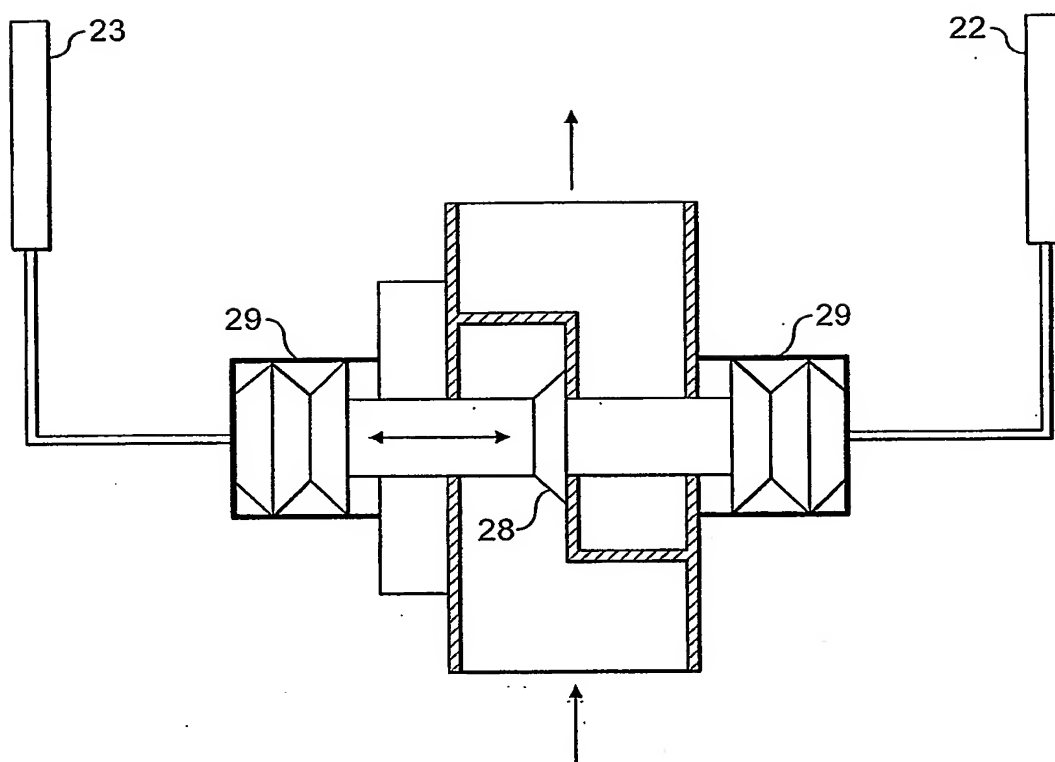


FIG. 7


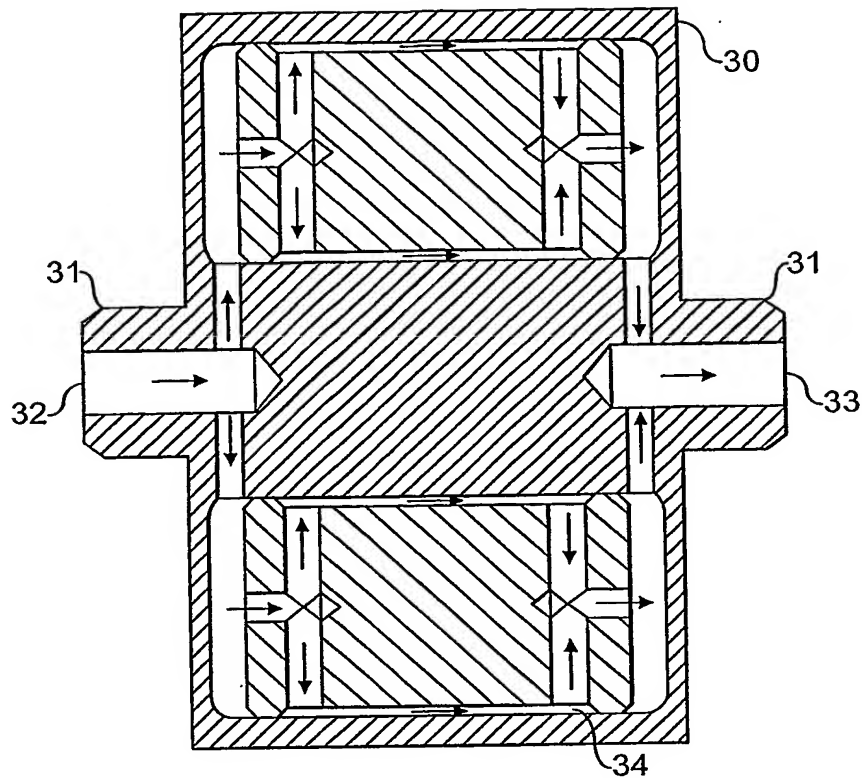


FIG. 8

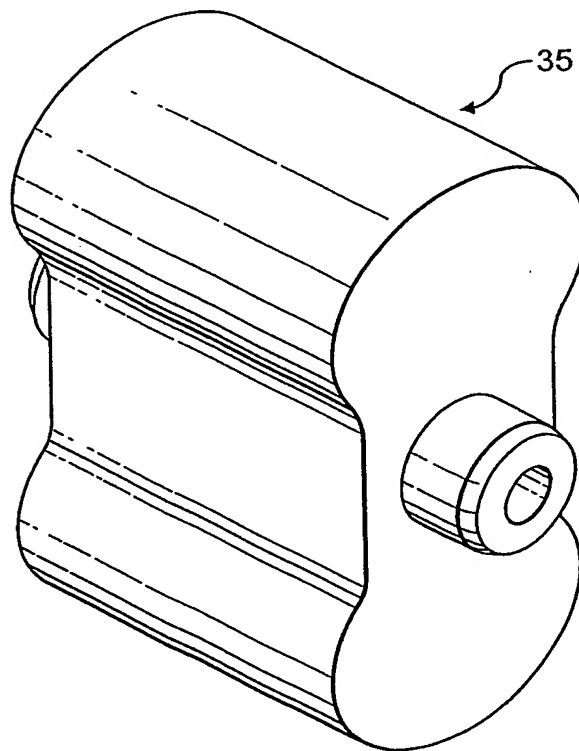

# INTERNATIONAL SEARCH REPORT

In national Application No

PCT/03/04415

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F04C29/04 F04C18/16 F04C18/12 F04C29/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F04C F01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 03/042542 A (LEYBOLD VAKUUM GMBH ;BEHLING MANFRED (DE); KRIEHN HARTMUT (DE); RO) 22 May 2003 (2003-05-22) the whole document	1-14, 20-22, 26, 29-31
X	US 4 983 106 A (WRIGHT DAN ET AL) 8 January 1991 (1991-01-08)	1-3, 26, 29-31
Y	the whole document	23
Y	DE 198 20 523 A (FRIEDEN PETER) 11 November 1999 (1999-11-11) figure 3	23
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

1 March 2004

Date of mailing of the international search report

05. 03. 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Dimitroulas, P



# INTERNATIONAL SEARCH REPORT

In national Application No  
PCT/JP 03/04415

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 03, 30 March 2000 (2000-03-30) & JP 11 336684 A (HITACHI LTD), 7 December 1999 (1999-12-07) abstract	1, 2, 26
A	PATENT ABSTRACTS OF JAPAN vol. 008, no. 238 (M-335), 31 October 1984 (1984-10-31) & JP 59 115492 A (HITACHI SEISAKUSHO KK), 3 July 1984 (1984-07-03) abstract	1, 23, 26
A	US 4 983 107 A (STEFFENS RALF ET AL) 8 January 1991 (1991-01-08) the whole document	1, 23, 26
A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 02, 31 March 1995 (1995-03-31) & JP 06 330875 A (SEIKO SEIKI CO LTD), 29 November 1994 (1994-11-29) abstract	1, 23, 26
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 544 (M-1489), 30 September 1993 (1993-09-30) & JP 05 149287 A (HITACHI LTD; OTHERS: 01), 15 June 1993 (1993-06-15) abstract	1, 23, 26
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 02, 30 January 1998 (1998-01-30) & JP 09 268993 A (TOCHIGI FUJI IND CO LTD), 14 October 1997 (1997-10-14) abstract	1, 23, 26
X	GB 1 160 551 A (KEALY) 6 August 1969 (1969-08-06) the whole document	24
X	DE 23 05 502 A (BAEHR THOMAS) 15 August 1974 (1974-08-15) the whole document	24
X	DE 32 03 322 A (HILBERS HEINRICH) 22 September 1983 (1983-09-22) the whole document	24
X	US 4 294 402 A (VOLLMER RUDOLF) 13 October 1981 (1981-10-13) the whole document	24
	-/--	

## INTERNATIONAL SEARCH REPORT

In national Application No

PCT/03/04415

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 29 26 599 A (BATTELLE INSTITUT E V) 15 January 1981 (1981-01-15) the whole document -----	24
X	DE 23 41 526 A (SAMSON APPBAU AG) 20 March 1975 (1975-03-20) the whole document -----	24
X	EP 0 827 057 A (DEUTSCH ZENTR LUFT & RAUMFAHRT) 4 March 1998 (1998-03-04) the whole document -----	24
A	GB 2 081 845 A (TRUCKTONICS LTD) 24 February 1982 (1982-02-24) the whole document -----	24

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/GB 03/04415

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☒ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:  
24
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

International Application No. PCT/GB 03 04415

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-23,26-31

A pump with thermal control means and a method for controlling the clearance between a rotor and a stator in such a pump  
---

2. claim: 24

A valve with flow restrictors and signal receptors  
---

3. claim: 25

A method for releasing the rotors of a pump that have seized  
---

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/03/04415

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03042542	A	22-05-2003	DE 10156179 A1	28-05-2003
			WO 03042542 A1	22-05-2003
US 4983106	A	08-01-1991	FR 2637655 A1	13-04-1990
			AT 93010 T	15-08-1993
			DE 68908323 D1	16-09-1993
			DE 68908323 T2	09-12-1993
			EP 0362757 A2	11-04-1990
			ES 2042922 T3	16-12-1993
			JP 2149791 A	08-06-1990
DE 19820523	A	11-11-1999	DE 19820523 A1	11-11-1999
JP 11336684	A	07-12-1999	NONE	
JP 59115492	A	03-07-1984	NONE	
US 4983107	A	08-01-1991	EP 0290663 A1	17-11-1988
			DE 3786917 D1	09-09-1993
			JP 2650041 B2	03-09-1997
			JP 63302193 A	09-12-1988
JP 06330875	A	29-11-1994	NONE	
JP 05149287	A	15-06-1993	NONE	
JP 09268993	A	14-10-1997	NONE	
GB 1160551	A	06-08-1969	NONE	
DE 2305502	A	15-08-1974	DE 2305502 A1	15-08-1974
DE 3203322	A	22-09-1983	DE 3203322 A1	22-09-1983
US 4294402	A	13-10-1981	DE 2747969 A1	10-05-1979
			BE 871531 A1	15-02-1979
			CA 1106813 A1	11-08-1981
			DK 476578 A	27-04-1979
			EP 0001615 A1	02-05-1979
			IT 1160012 B	04-03-1987
DE 2926599	A	15-01-1981	DE 2926599 A1	15-01-1981
DE 2341526	A	20-03-1975	DE 2341526 A1	20-03-1975
EP 0827057	A	04-03-1998	DE 19635339 A1	05-03-1998
			EP 0827057 A1	04-03-1998
GB 2081845	A	24-02-1982	NONE	